


- Robust clamps of malleable iron, zinc plated and yellow passivated (free of chrome VI) resp. stainless steel 1.4401
- Easy and secure, for various fittings and applications

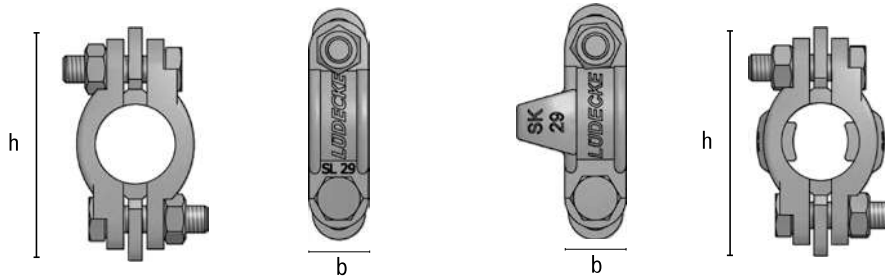

Max. Working Pressure	Material	Material Screws	Norm
PN 16 / 25 bar	malleable iron / stainless steel	DIN 933-8,8 VG / 1,4401	☺ below

Hose Clamps, two parts with overlapping cast-on-saddles

For hose i.D.	Hose o.D./Range	b	h	PN	Weight/pc. g		Type No.
1/2" = 13 mm	17-22 mm	17	60	16	95	10	S 22
3/4" = 19 mm	27-32 mm	17	70.5	16	105	10	S 34

Hose Clamps DIN 20039 A, two parts with loose saddles, Material Stainless Steel 1.4401

Size	For hose i.D.	Screws	Hose o.D./Range	b	h	PN	Weight/pc. g		Type No.
1/2" = 13 mm	M 8 x 30	18-26 mm	18	63	16	140	5		SLE 13
3/4" = 19 mm	M 8 x 30	26-33 mm	18	71	16	160	5		SLE 19
1" = 25 mm	M 10 x 35	32-40 mm	18	81	16	210	5		SLE 25

Hose Clamps DIN 20039 A*, two parts with loose saddles

For hose i.D.	Hose o.D./Range	b	h	PN	Weight/pc. g		Type No.
1/2" = 13 mm	22-29	18	63	16	128	10	SL 29*
3/4" = 19 mm	28-34	18	71	16	134	10	SL 34*
1" = 25 mm	32-40	18	81	16	188	10	SL 40*
1 1/4" = 32 mm	39-49	20	91	16	244	10	SL 49*
1 1/2" = 38 mm	48-60	24	108	16	297	5	SL 60*
2" = 50 mm	56-72	25	116	16	340	5	SL 72
2" = 50 mm	60-76	25	127	16	405	5	SL 76*
2 1/2" = 63 mm	77-94	30	146	16	556	5	SL 94*
3" = 75 mm	89-101	25	139	16	665	1	SL 400
3" = 75 mm	94-115	35	176	16	739	1	SL 115
3 1/2" = 89 mm	113-127	27	170	16	890	1	SL 525
3 1/2" = 89 mm	115-145	38	198	16	1046	1	SL 145
4" = 100 mm	127-140	28	178	16	972	1	SL 550
4" = 100 mm	135-155	27	194	16	984	1	SL 600
5" = 125 mm	155-175	30	217	16	1130	1	SL 675
6" = 150 mm	175-195	30	244	16	1445	1	SL 769
7" = 175 mm	210-225	35	280	16	2163	1	SL 875
8" = 200 mm	227-250	35	312	16	2610	1	SL 988

Hose Clamps DIN 20039 B, two parts with loose saddles and safety claws

For hose i.D.	Hose o.D./Range	b	h	PN	Weight/pc. g		Type No.
1/2" = 13 mm	22-29	18	63	25	142	10	SK 29
3/4" = 19 mm	28-32	21	77	25	220	10	SK 34
1" = 25 mm	35-42	22	90	25	272	10	SK 39
1 7/64" = 28 mm	42-45	24	98	25	340	5	SK 44
1 3/8" = 35 mm	45-53	25	108	25	380	5	SK 51
1 5/8" = 42 mm	55-60	26	119	25	416	1	SK 60
2" = 50 mm	60-73	30	132	25	637	1	SK 73
3" = 75 mm	86-102	28	160	25	860	1	SK 75

JOMIAL - Mangueras Hidráulicas e Industriales - Correas en "V"

Casa Matriz - Lord Cochrane 1060 - Santiago - Teléfono 2327 31 901